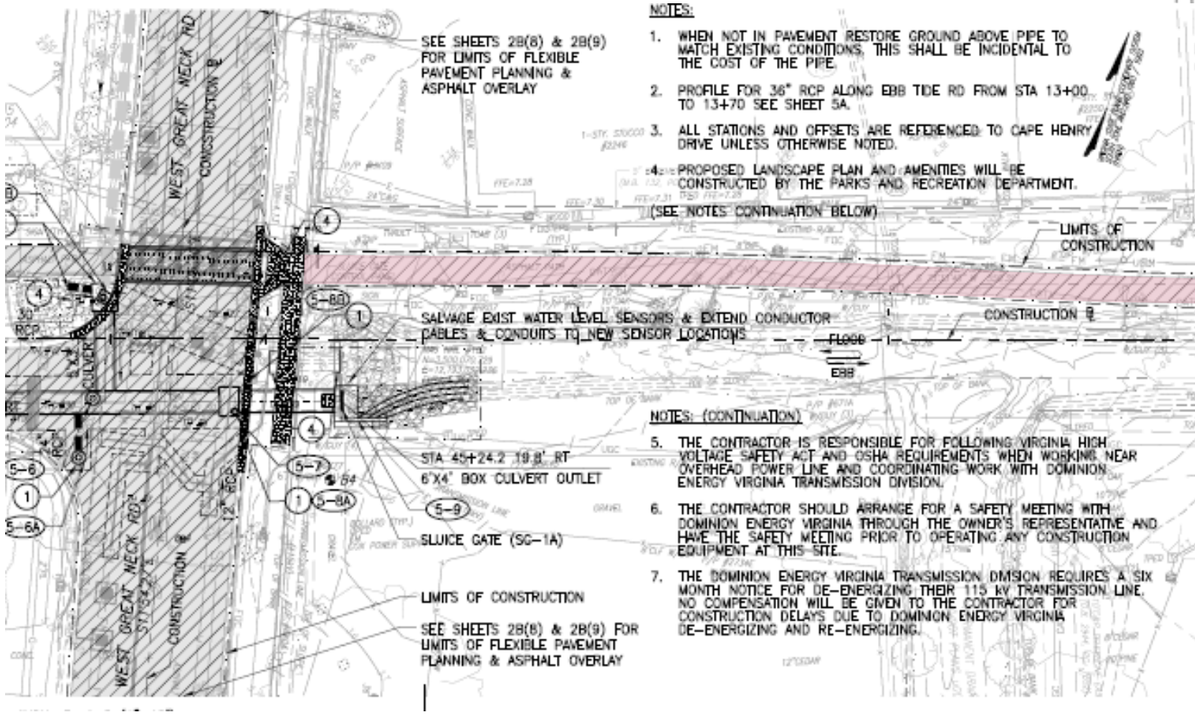


NOTES:

1. WHEN NOT IN PAVEMENT RESTORE GROUND ABOVE PIPE TO MATCH EXISTING CONDITIONS. THIS SHALL BE INCIDENTAL TO THE COST OF THE PIPE.
2. PROFILE FOR 36" RCP ALONG EBB TIDE RD FROM STA 13+00 TO 13+70 SEE SHEET 5A.
3. ALL STATIONS AND OFFSETS ARE REFERENCED TO CAPE HENRY DRIVE UNLESS OTHERWISE NOTED.
4. PROPOSED LANDSCAPE PLAN AND AMENITIES WILL BE CONSTRUCTED BY THE PARKS AND RECREATION DEPARTMENT.

(SEE NOTES CONTINUATION BELOW)

NOTES: (CONTINUATION)
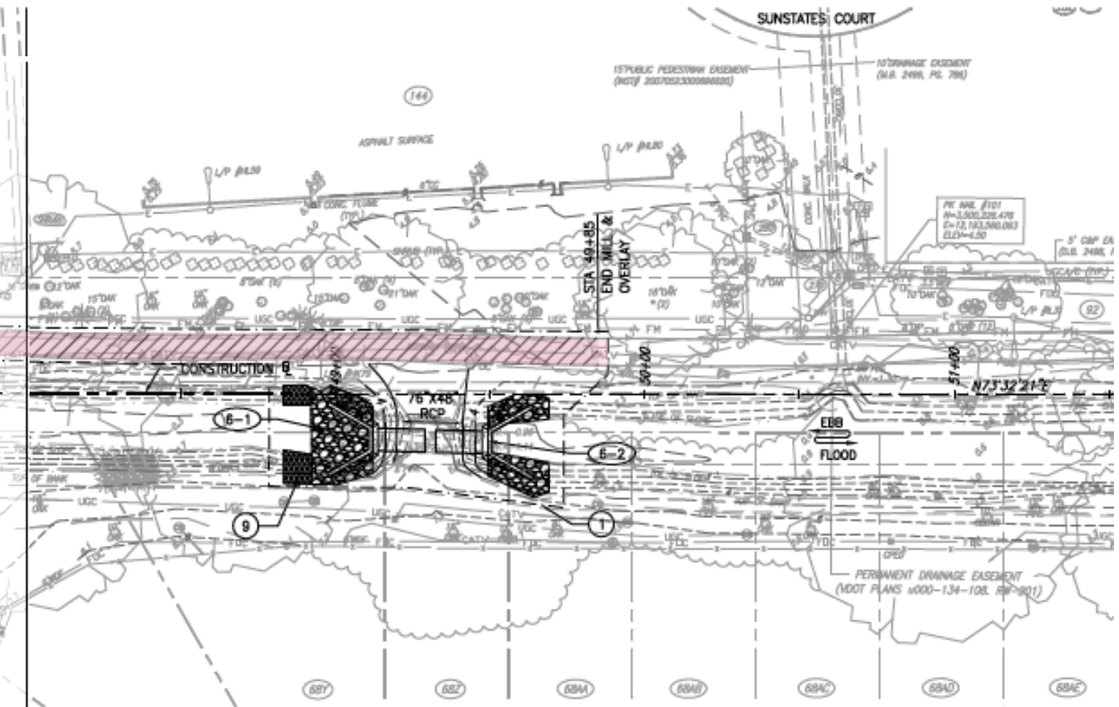
5. THE CONTRACTOR IS RESPONSIBLE FOR FOLLOWING VIRGINIA HIGH VOLTAGE SAFETY ACT AND OSHA REQUIREMENTS WHEN WORKING NEAR OVERHEAD POWER LINE AND COORDINATING WORK WITH DOMINION ENERGY VIRGINIA TRANSMISSION DIVISION.
6. THE CONTRACTOR SHOULD ARRANGE FOR A SAFETY MEETING WITH DOMINION ENERGY VIRGINIA THROUGH THE OWNER'S REPRESENTATIVE AND HAVE THE SAFETY MEETING PRIOR TO OPERATING ANY CONSTRUCTION EQUIPMENT AT THIS SITE.
7. THE DOMINION ENERGY VIRGINIA TRANSMISSION DIVISION REQUIRES A SIX MONTH NOTICE FOR DE-ENERGIZING THEIR 115 kV TRANSMISSION LINE. NO COMPENSATION WILL BE GIVEN TO THE CONTRACTOR FOR CONSTRUCTION DELAYS DUE TO DOMINION ENERGY VIRGINIA DE-ENERGIZING AND RE-ENERGIZING.